

How to Connect Token Display on your WiFi network

1. Turn ON token dispenser then WiFi on your mobile/computer, find WiFi name

HEXTEK-DisplayAP and select HEXTEK-DispalyAP as shown on as image.1 & 2

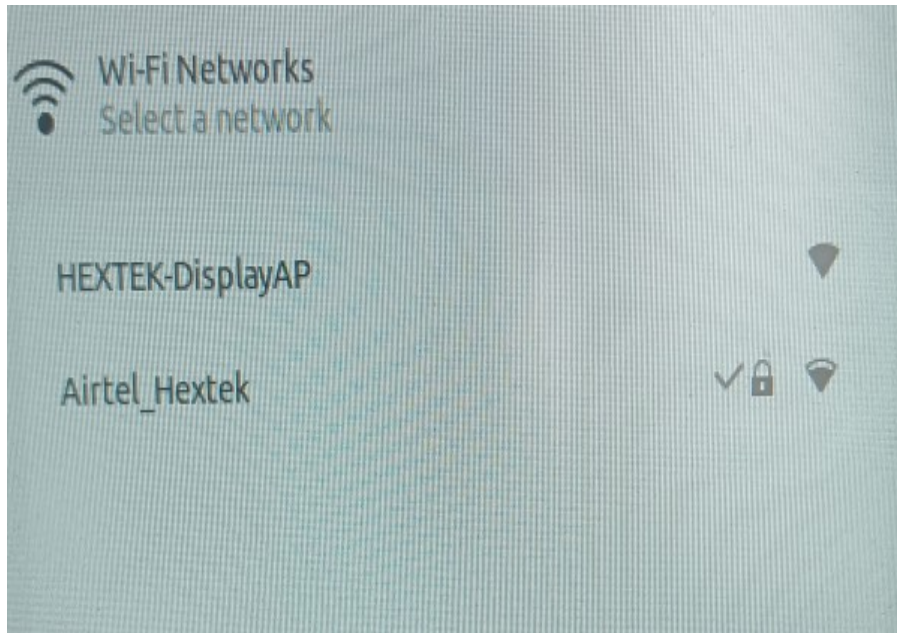


image.1

2.. Select Configure WiFi, it will list all available nearby WiFi network names as given on

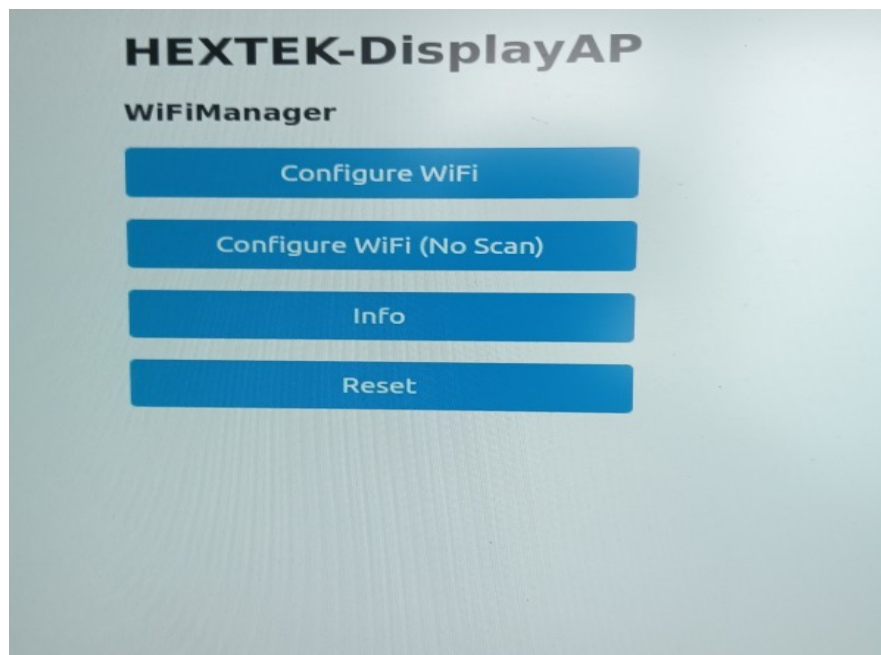


image.2

3. Select your WiFi name, type WiFi password to connect token display on your WiFi network

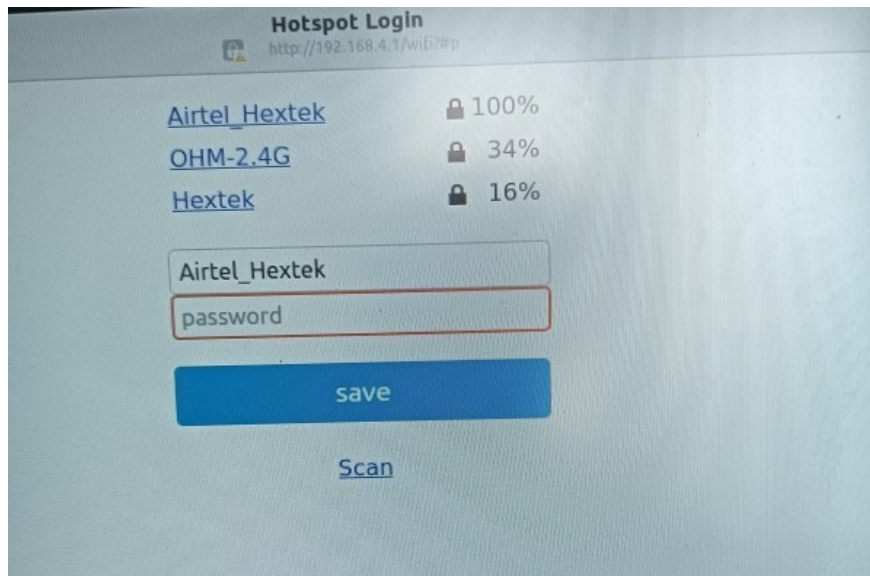


image.3

4. . Click save to save WiFi credentials

