

Token Dispenser RESET API

Connecting HEXTEK token dispenser on your WiFi network

1. Turn ON token dispenser then WiFi on your mobile/computer, find WiFi AP name HEXTEK-PrinterAP as shown on image.1

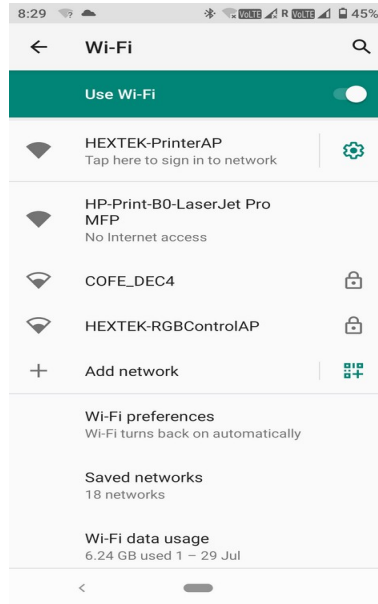


image.1

2. Select HEXTEK-Printer AP then it will show further menus as given on image.2.

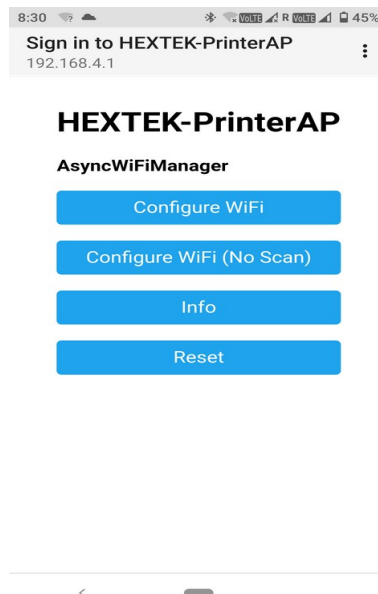


image.2

3. Select **Configure WiFi**, it will list all available nearby WiFi names as given on image.3

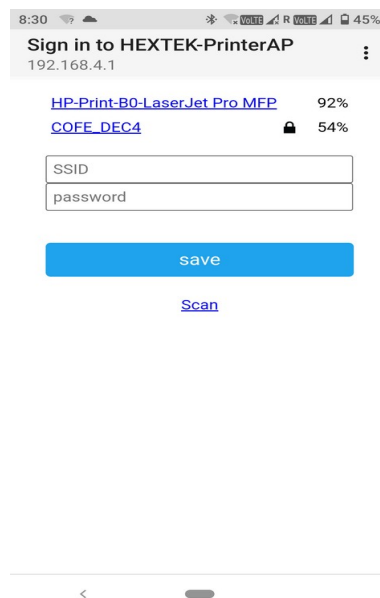


image.3

4. Select your WiFi name enter it's password, now dispenser will be connected on your WiFi network.

Note: if given WiFi credentials are correct token dispenser will be connected on your network otherwise HEXTEK-PrinterAP signal will appear again.

RESET API

Open any web browser enter following GET request to test token dispenser

1) To set and print service 1 current token number to 5 → Dispenser IP/set-token1?token1=5

2) To view last printed token number of service 1 → Token dispenser IP/get-report1?

3) To set token dispenser date time → Dispenser IP/get-datetime?datetime=12/05/21 12:45:25

4) To reset token → Dispenser IP /reset?